

EATON

Powerware

Powerware SPFi 3 Phase Premium Power Filter

Product Focus


Series Power and Noise Filter with Shunt surge diverter, 3 Phase 100-400A, 80-240kA



The SPFi is designed to provide point-of-entry and sub-circuit protection against power surges caused by external sources such as lightning strikes and substation switching as well as providing a measure of protection from surge events generated on the secondary side of the filter. An ideal device for All Category locations.

The SPFi is a 3-stage protection system utilising primary and secondary MOV protection in conjunction with a Low-Q LC filter. The unit provides filtering of the line harmonics, noise and RF transmitters with a cut-off frequency of <math><10\text{kHz}</math> and a minimum attenuation of 40dB above 1MHz. Special care has been taken in the design of the filter to minimise ringing caused by light loads, surge diverter operation and inductive load back-EMF.

All models in the SPFi Series are fully enclosed in wall mounting IP24 steel enclosures. A graphical mimic display provides at-a-glance indication of the status of the SPFi with indicators showing correct functions in green and faults in red. The alarm function provides a summary alarm output for protection failure and power failure.

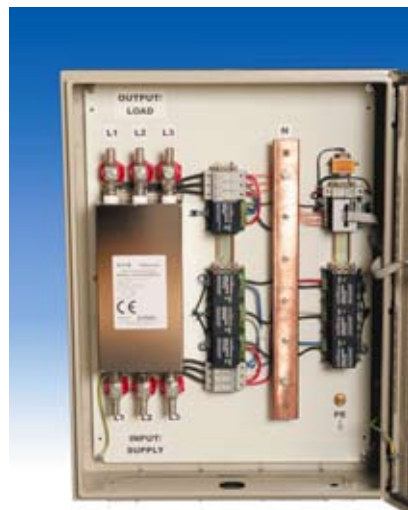

Features

- Surge suppression and filtering in a single package
- 1 mode, Multi-Element Series Filter
- 2 mode, 2 stage Surge Diverter
- Standard Current ratings from 100A to 400A
- Surge suppression ratings from 80kA to 240kA
- Incorporates a UL1283 RMI/EFI Filter
- Provides extensive high frequency and RF filtering
- Panel-mounted mimic display
- Protection Fail Alarm Relay
- Enclosed in IP24 painted steel cabinet
- 5 Year Warranty

Typical applications:

- All Power Circuits including "Point-of-Entry"
- Telecommunications Systems and Rectifiers
- Process and Control Systems and UPS Systems
- Computer Systems and Medical Systems
- AV circuits for clubs and hotels
- All sensitive Electronic Equipment

Options:

- Custom configurations
- Current ratings to 2500A
- Surge suppression ratings up to 360kA
- Isolation switches and circuit breakers
- Custom cabinets
- Chassis Mount versions

Technical Specifications

POWERWARE SPFi

Model	SPFXXX3CEi	SPFXXX3DEi	SPFXXX3EEi
Input voltage	380 - 440VAC 3 Phase		
Maximum continuous voltage – MCOV	300VAC		
Temporary overvoltage - TOV	320VAC, 15 mins		
Service type	TT, TN, TN C-S or any 3-phase system with a grounded neutral. This unit must not be connected to an ungrounded system		
Test classification	Class II		
Energy Absorption rating - per mode (Joules)			
Primary protection L-N: Secondary protection L-N: Common mode protection N-E: Aggregate rating:	1,200J/ph, 3,600J total. 600J/ph, 1,600J total. 2,130J. 7,530J.	1,800J/ph, 5400J total. 600J/ph, 1800J total. 710J. 7,910J.	3,600J/ph, 10,8000J total. 600J/ph, 1,800J total. 710J. 13,310J.
Current rating – continuous (standard models)	100A, 150A, 200A, 250A, 315A, 400A		
Recommended maximum over current protection	100A, 150A, 200A, 250A, 315A, 400A		
Residual current	<1 mA		
Short circuit withstand (1 sec)	29kA		
Protection modes	Line-Neutral, Neutral-Earth	Line-Neutral, Neutral-Earth	Line-Neutral, Neutral-Earth
In 8/20us (Line-Neutral) Nominal Surge Life	30kA x 20 hits per Phase	45kA x 20 hits per Phase	90kA x 20 hits per Phase
In 8/20us (Neutral-Earth) Nominal Surge Life	45kA x 20 hits	15kA x 20 hits	15kA x 20 hits
I _{max} 8/20us (Line-Neutral) Max surge level	80kA per Phase	120kA per Phase	240kA per Phase
I _{max} 8/20us (Neutral-Earth) Max surge level	120kA	40kA	40kA
Filter attenuation	40dB nominal above 1MHz		
Initial clamp voltage (Line-Neutral)	560V (350Vac RMS)		
Initial clamp voltage (Line-Earth)	1240V (700Vac RMS)		
Initial clamp voltage (Neutral-Earth)	680V (420Vac RMS)		
Residual voltage (V _{pl}) Line-Neutral	<900Vac (3kA, 8/20uS)		
Residual voltage (V _{pl}) Line-Earth	<1100Vac (3kA, 8/20uS)		
Residual voltage (V _{pl}) Neutral-Earth	<1000Vac (3kA, 8/20uS)		
Internal protection (fusing)	All surge diverter connections are fused via HRC fuses to IEC269-2-1		
Terminations	Bolted lug. 8mm bolts for phase and neutral connections. 8mm PE (earth) stud provided on geartray.		
Alarms/indicators	Mimic panel display via LED (2 colour), OK - Green; Protection Fault - Red. Dry contact alarm relay output – 250Vac/32Vdc, 10A, 4kV isolation, Alarm under-voltage cutoff 180Vac.		
Enclosure rating	IP24		
Design standards:	IEC61643-1, IEC610006-1,2,3,4 ANSI/IEEE C62.41 Cat B,C,D,E AS1768-1991 Cat B,C,D,E AS3000, AS3100, CE mark		
Dimensions	100A to 250A = 600 x 200 x 800 mm (W x D x H) 315A & 400A = 800 x 400 x 1000 mm (W x D x H)		
Weight	100A & 150A = 50 kg, 200A & 250A = 60kg, 315A & 400A = 100 kg		
Environment	-10 to 65 C, 10 to 90%RH (non-condensing)		

In the interests of continual product improvement all specifications are subject to change without notice.

Eaton, Powerware, Hot Sync, Advanced Battery Management, LanSafe, PowerVision, and FORESEER are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. © 2007 Eaton Corporation, All Rights Reserved.



Natural Power Solutions (VIC)
Unit 1, 40 Jellico Drive
Scoresby VIC 3179
T: 03 9764 8550
F: 03 9764 8770

Natural Power Solutions (QLD)
Unit 8, 210 Queensport Road
Murarrie QLD 4172
T: 07 3907 0222
F: 07 3907 0333

Natural Power Solutions (NSW)
Unit 8, 2-6 Waltham Street
Artarmon NSW 2064
T: 02 9906 6696
F: 02 9906 6434

Natural Power Solutions (WA)
Unit 20, 9 Inspiration Drive
Wangara WA 6065
T: 08 9302 6366
F: 08 6210 5915

Natural Power Solutions (ACT)
Unit 5, 82-84 Townsville Street
Fyshwick ACT 2609
T: 02 6239 3802
F: 02 6239 3811

www.nps.com.au



Powerware