

Single-phase
UPS

NETYS PE

from 400 to 1 400 VA

top of the range electrical protection

A PERSONAL configuration

- Adapted to protect office applications.
- A range of four nominal voltages.

A solution to network power cuts and voltage variations

- Thanks to the integrated AVR function (Automatic Voltage Regulation).

Adapted connection

- Computer usage on IEC 320 sockets (IT standard).

Protection for your phone line

- Protection for the phone line/modem/ADSL (RJ11 connector) on the 600 to 1400 VA models.

Easy to use

- Control panel with LEDs allowing the operating mode to be easily monitored.

Communication with the computer system

- RS232 and USB advanced connections for management of the power supply and of the controlled automatic shutdown of applications via PC (**NETYS PE** 600 to 1400 VA models).

INTERACTIVE LINE
WITH AVR

2 YEAR GUARANTEE



YS PE
400/600/800 VA



NETYS PE
1000/1400 VA



Your protection for

- > CAD, graphic workstations
- > Multimedia workstations and peripherals
- > LCD or CRT monitors




SOCOMECS UPS ASIA Pte. Ltd - 31 Ubi Road 1
01-00 (Annex) AZTECH BUILDING - 400694 SINGAPORE
Tel. +65 6745 7555 - Fax +65 6458 7377
sg.ups.sales@socomec.com

SOCOMECS SICON (M) SDN BHD
31 Jalan SS 25/41 - Mayang Industrial Park
47301 Petaling Jaya. - Selangor, MALAYSIA
Tel. +603 7804 0850 - Fax. +603 7803 8489
sales@cspm.com.my

SOCOMECS UNITRO LIMITED
17/178 Prachachuen Road - TungSong Hong, Laksi
Thailand- 10210 BANGKOK
Tel. +66 2 503 92 43 - Fax. +66 2 503 99 23
inquiry@socomec-unitro.co.th

socomec
Innovative Power Solutions UPS

Connections

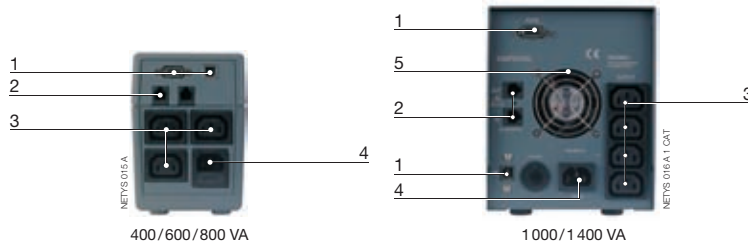


- 1. RS232/USB serial port
- 2. Phone/modem line protection
- 3. UPS output sockets

- 4. Input socket and fuse
- 5. Fan/air vents

Communication option

- **UNI VISION** software for the control and automatic shutdown of applications connected to Windows™ and Linux. Free to download from our website: www.socomec.com.

Control panel

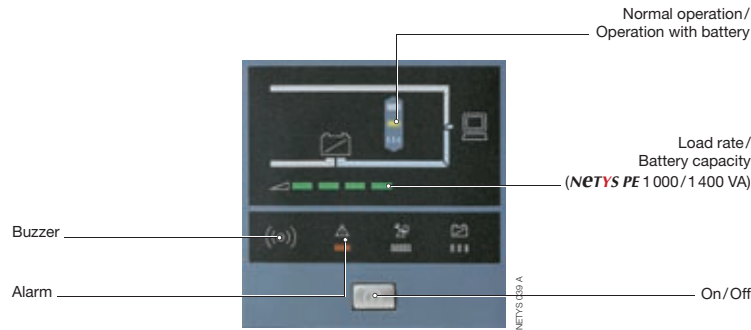

Technical data

	NETYS PE 400	NETYS PE 600	NETYS PE 800	NETYS PE 1000	NETYS PE 1400
MODELS	400	600	800	1000	1400
ITEM CODE	NET0400-PE	NET0600-PE	NET0800-PE	NET1000-PE	NET1400-PE
UPS power	400 VA (240 W)	600 VA (360 W)	800 VA (480 W)	1000 VA (600 W)	1400 VA (840 W)
Input	230V (170 ÷ 280V); 50/60 Hz with automatic selection				
Output	230V nominal; 50/60 Hz				
Output sockets	3 IEC320			4 IEC320	
Telephone protection	- telephone line/modem/ADSL input/output: RJ11				
BATTERIES					
Type	sealed lead - acid maintenance free - expected life 3/5 years				
Back-up time ⁽¹⁾	8 min.	15 min.	20 min.	45 min.	60 min.
COMMUNICATION					
Interface	- RS232 and USB serial port (free software via Internet)				
ENVIRONMENT					
Dimensions W x D x H (mm)	99 x 334 x 143			140 x 370 x 180	
Weight	5.0 kg	6.1 kg	6.6 kg	13.6 kg	14.5 kg
Reference standards	(EN) IEC62040-1-1 (safety), EN50091-2/IEC62040-2 (EMC), EN61000-4-5/C62.41: 1991 (over voltage)				

(1) PC + LCD monitor 15".