

Single-phase  
UPS

# NETYS PR

from 1000 to 3000 VA  
versatile UPS

## A PROFESSIONAL UPS

- Designed for professional environments, protection against power cuts and over voltage is ensured by Line Interactive technology with automatic voltage regulation (AVR).

## An installation adapted to the environment

- It can even be installed as a Tower, Mini-Tower or 19" Rack, depending on the user's needs.

## Simplified maintenance

- Battery 'hot swap', without closing down other applications.
- Battery can be changed from the front in rack installations.
- Battery check system and replacement indicator.

## Adapted connections

- Easy connections to the applications (depending on power) via 6 or 8 IEC 320 (IT standard) sockets.

## A secure UPS

- EPO (Emergency Power Off) emergency stop.

## Data line protection

- With RJ45 connector.

## Communication with the computer system

- RS232 or USB\* advanced connections for the management of the power supply and local/remote shutdown of applications.
- Advanced diagnostics and remote control via various protocols and environments of use: JBUS, HID, SNMP, TCP/IP.

\* USB models from 1500 to 3000 VA.

INTERACTIVE LINE WITH  
AVR - SINUSOIDAL OUTPUT

2 YEAR GUARANTEE



NETYS PR  
1000 VA



NETYS PR  
1500/2000 VA



NETYS PR  
3000 VA




NETYS PR  
1500/2000 VA Rack

Your protection  
for

- > Professional and IT equipment
- > Servers and Networking devices
- > CAD/graphic workstations with monitors and peripherals
- > Control systems




## Connections

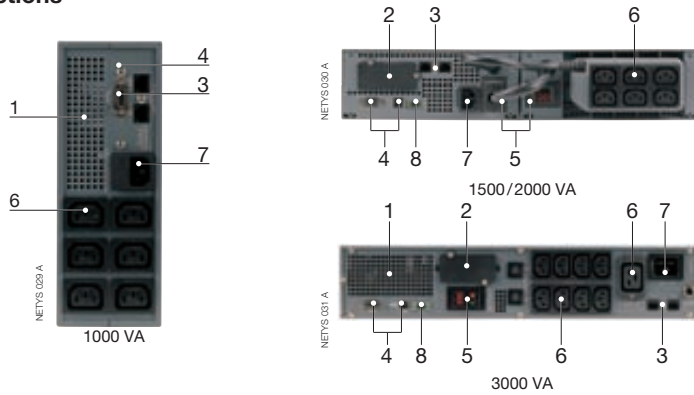

1. Fan/air vents
2. Slot for optional communication boards
3. NTP protections (RJ45)
4. RS232/USB serial port
5. Connector for external battery extension
6. UPS output sockets
7. Input socket with fuse
8. EPO Emergency Power Off

## Control panel

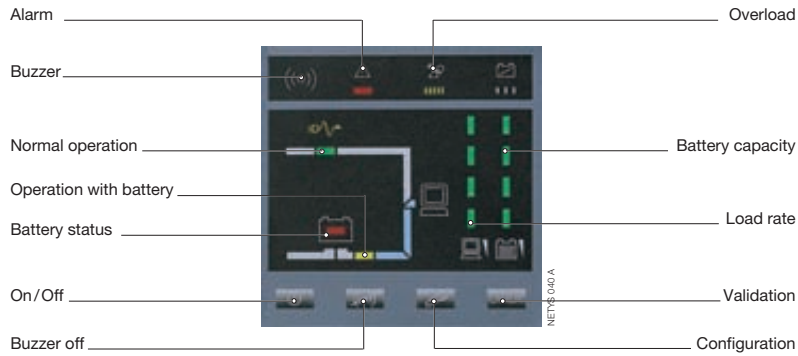

## Communication options


- **UNI VISION** software for the control and automatic shutdown of applications connected to Windows™ and Linux. Free to download from our website: [www.socomec.com](http://www.socomec.com).
- **UNI VISION PRO** software for the management of connected applications and to control automatic shutdowns. Serial cable included.
- **NET VISION** interface SNMP/WEB manager for the connection of the UPS to the Ethernet network. This accessory can be integrated in the UPS by means of the slot located on the back panel.

## Technical data


MODELS	NETYS PR 1000	NETYS PR 1500	NETYS PR 2000	NETYS PR 3000
ITEM CODE	NET1000-PR	NET1500-PR	NET2000-PR	NET3000-PR
UPS power	1000 VA (700 W)	1500 VA (1000 W)	2000 VA (1340 W)	3000 VA (2100 W)
Input	230 V (160 ÷ 276 V) ; 50 / 60 Hz with automatic selection			
Output	230 V nominal ; 50/60 Hz			
Output sockets	6 IEC 320 (10 A)			2 sets of 4 IEC 320 (10 A) + 1 16 A socket
Data line protection	NTP data line suppressor: RJ45 10 Base T			
<b>BATTERIES</b>				
Type	sealed lead-acid maintenance free - expected life 3 / 5 years			
Typical back-up time <sup>(1)</sup>	8 min.	8 min.	8 min.	8 min.
<b>COMMUNICATION</b>				
Connection interface	RS232	RS232 and USB		
Ethernet	NET VISION interface: Web Server/SNMP			
<b>ENVIRONMENT</b>				
Dimensions W x D x H (mm)	87 x 385 x 235	2 x (87 x 415 x 220)		87 x 585 x 440
Dimensions rack W x D x H (mm)	-	435 x 415 x 87 (2U)		440 x 585 x 87
Weight	9.6 kg	18 kg	19 kg	31.5 kg
Reference standards	(EN) IEC 62040-1-1 (safety), EN 50091-2/IEC 62040-2 (EMC), EN 61000-4-5/C62.41: 1991 (over voltage)			

(1) Back-up time at 75% of the nominal power.

## Battery extension

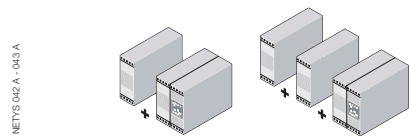

NETYS PR	+ 1 (NETEX 20 PR)	+ 2 (NETEX 20 PR)
1500	25 min.	45 min.
2000	20 min.	36 min.

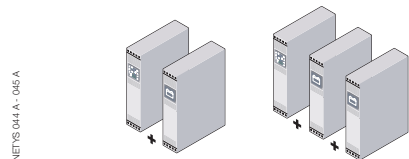

NETYS PR	+ 1 (NETEX 30 PR)	+ 2 (NETEX 30 PR)
3000	30 min.	60 min.